Nikon

At the heart of the image

I AM A NIKON COOLPIX

I AM THE NIKON COOLPIX COMPACT DIGITAL CAMERA LINEUP

SPRING 2012

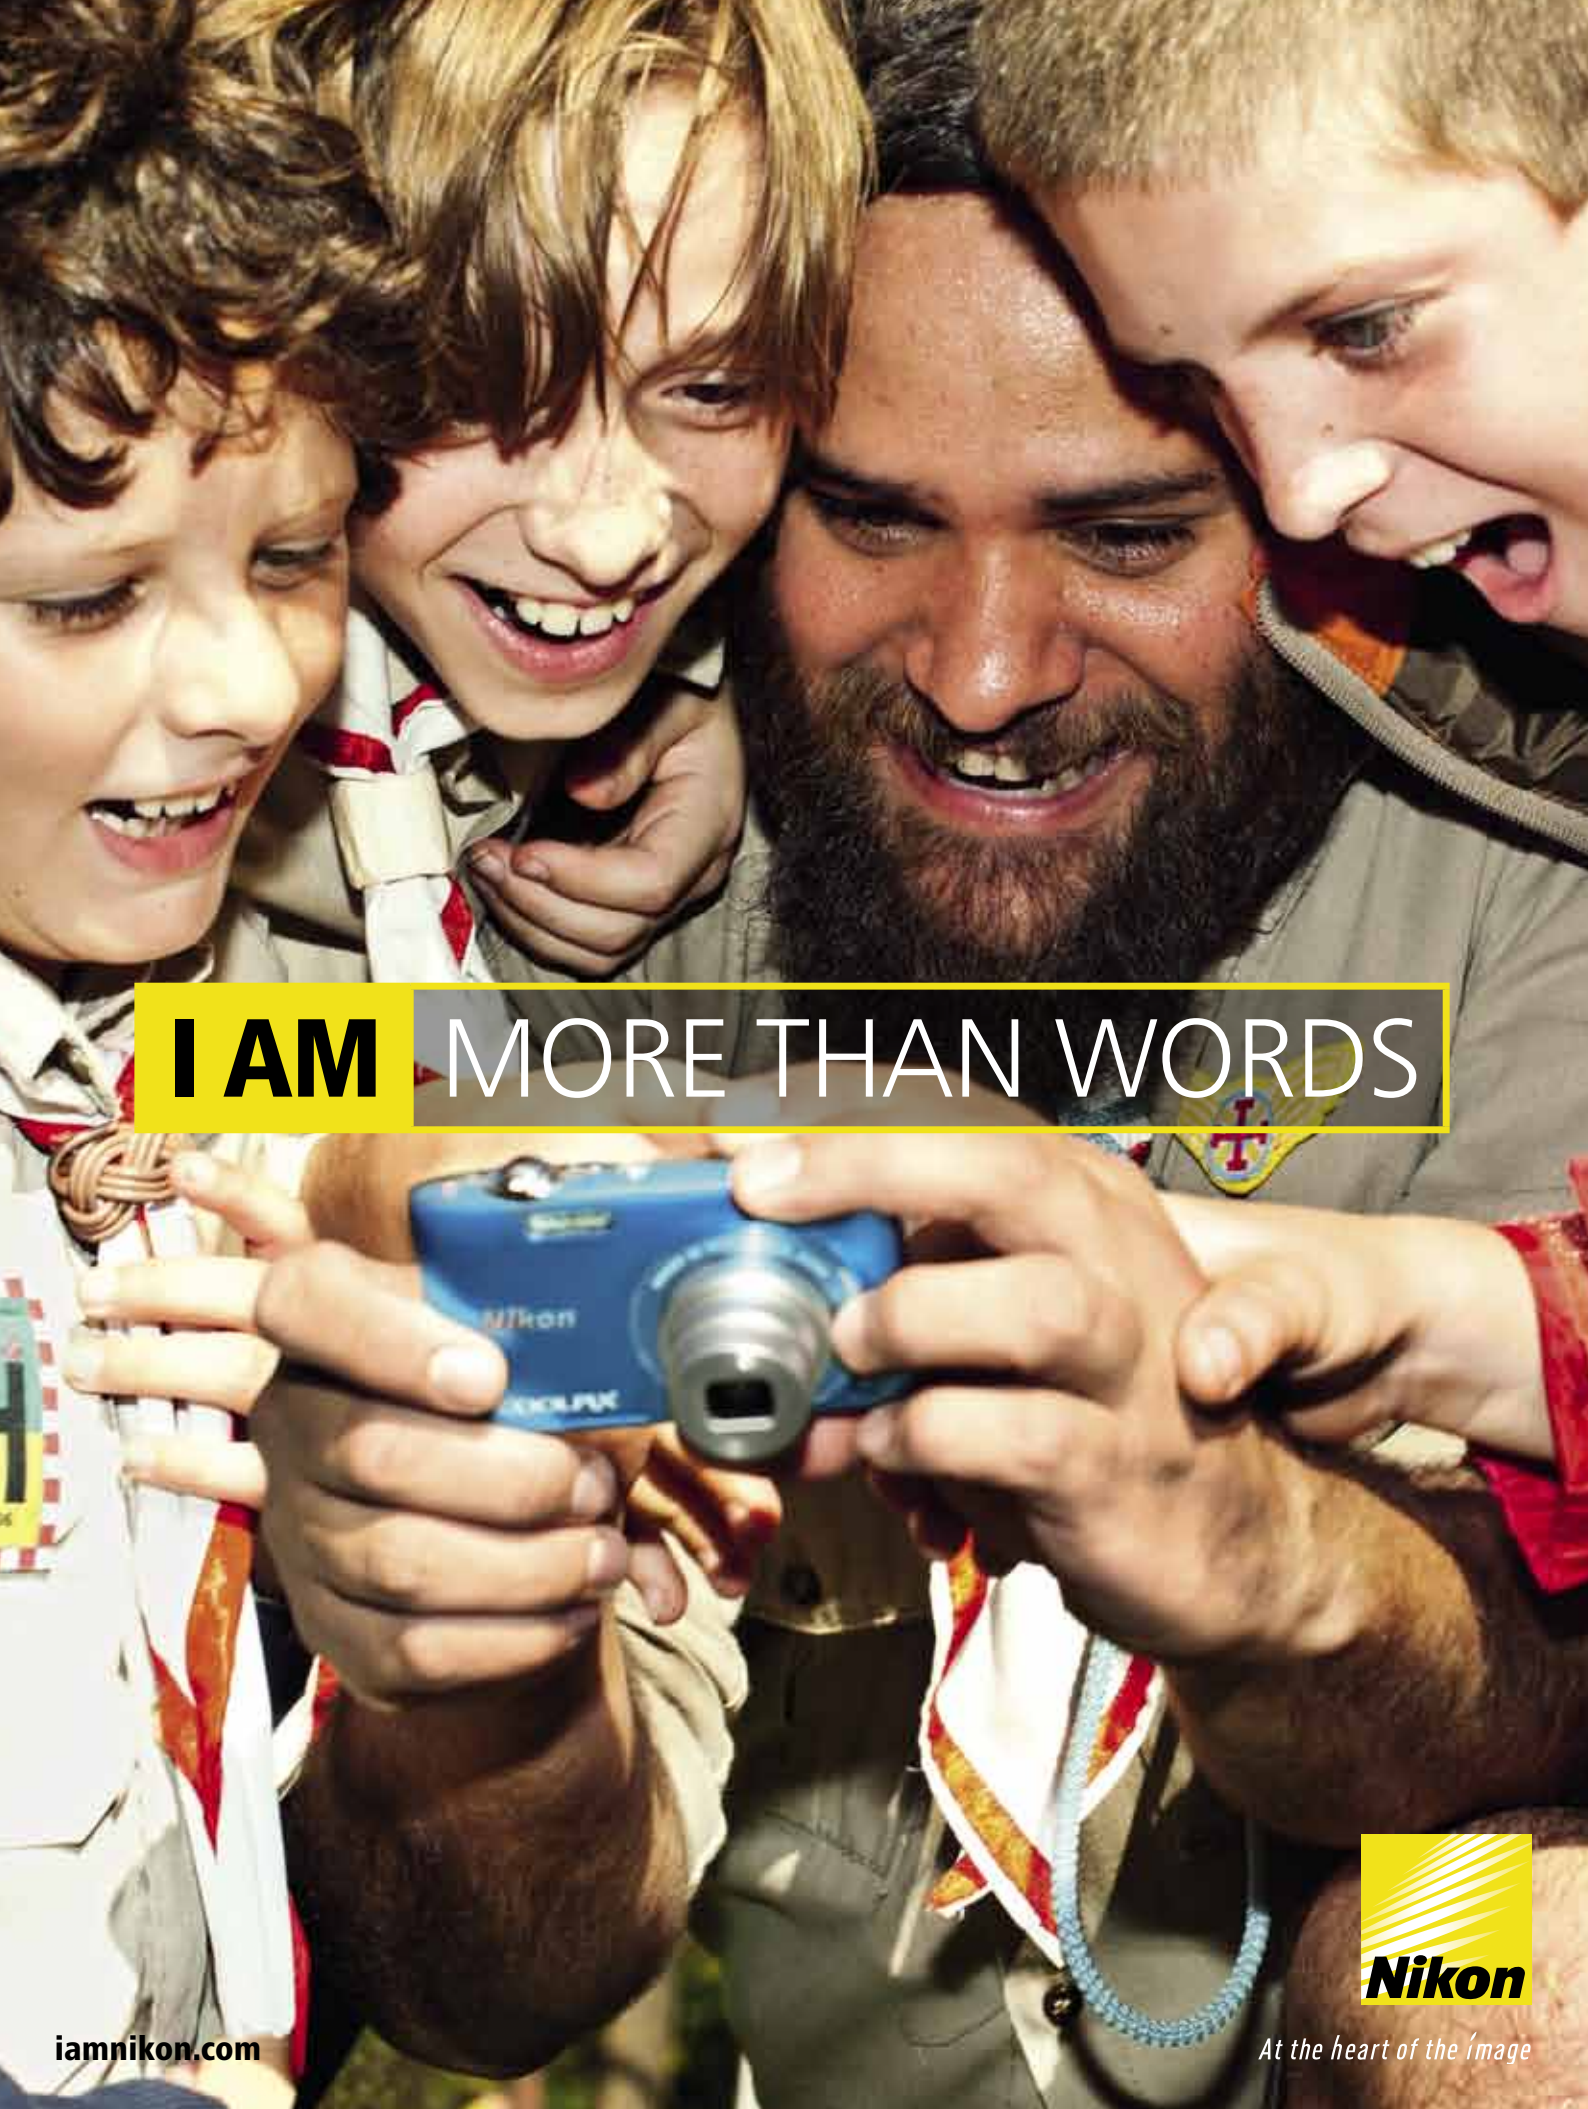
I AM MORE THAN WORDS
Nikon
iamnikon.com
At the heart of the image

Creating exceptional memories everyday.

New

COOLPIX P510

42x zoom and optimized performance.

16.1 MP CMOS | 42x Zoom | 7.5-cm (3-in.) LCD

New

COOLPIX P310

Creative inspiration with a f/1.8 lens.

16.1 MP CMOS | 4.2x Zoom | 7.5-cm (3-in.) LCD

New

COOLPIX S9300

18x zoom with just-fit style and performance.

16.0 MP CMOS | 18x Zoom | 7.5-cm (3-in.) LCD

New

COOLPIX S6300

Quality, elegance and high performance.

16.0 MP CMOS | 10x Zoom | 6.7-cm (2.7-in.) LCD

New

COOLPIX S4300

Ultra-slim, stylish and delightfully touchable.

16.0 MP CCD | 6x Zoom | 7.5-cm (3-in.) LCD

New

COOLPIX S3300

Elegance, creativity and versatility.

16.0 MP CCD | 6x Zoom | 6.7-cm (2.7-in.) LCD

New

COOLPIX S2600

Stylish performer with a passion for quality.

14.0 MP CCD | 5x Zoom | 6.7-cm (2.7-in.) LCD

New

COOLPIX L810

26x zoom with quality and easy operation.

16.1 MP CCD | 26x Zoom | 7.5-cm (3-in.) LCD

New

COOLPIX L26

Easy shooting yields stunning results.

16.1 MP CCD | 5x Zoom | 7.5-cm (3-in.) LCD

New

COOLPIX L25

The easy way to preserve memories beautifully.

10.1 MP CCD | 5x Zoom | 7.5-cm (3-in.) LCD

New

COOLPIX S30

Designed tough for all to enjoy.

10.1 MP CCD | 3x Zoom | 6.7-cm (2.7-in.) LCD

COOLPIX P7100

Master of imagery and portability.

10.1 MP CCD | 7.1x Zoom | 7.5-cm (3-in.) LCD

COOLPIX AW100

The tough new take on go-anywhere photography.

16.0 MP CMOS | 5x Zoom | 7.5-cm (3-in.) LCD

COOLPIX S1200pj

When camera also becomes theater.

14.1 MP CCD | 5x Zoom | 7.5-cm (3-in.) LCD

COOLPIX S100

OLED screen for vivid color.

16.0 MP CMOS | 5x Zoom | 8.7-cm (3.5-in.) OLED

COOLPIX S8200

Fast, powerful and precise 14x optical zoom.

16.1 MP CMOS | 14x Zoom | 7.5-cm (3-in.) LCD

COOLPIX S6200

Stylishly compact 10x zoom.

16.0 MP CCD | 10x Zoom | 6.7-cm (2.7-in.) LCD

Note: Camera lineup and color availability may vary according to region.

Covering all the angles beautifully.

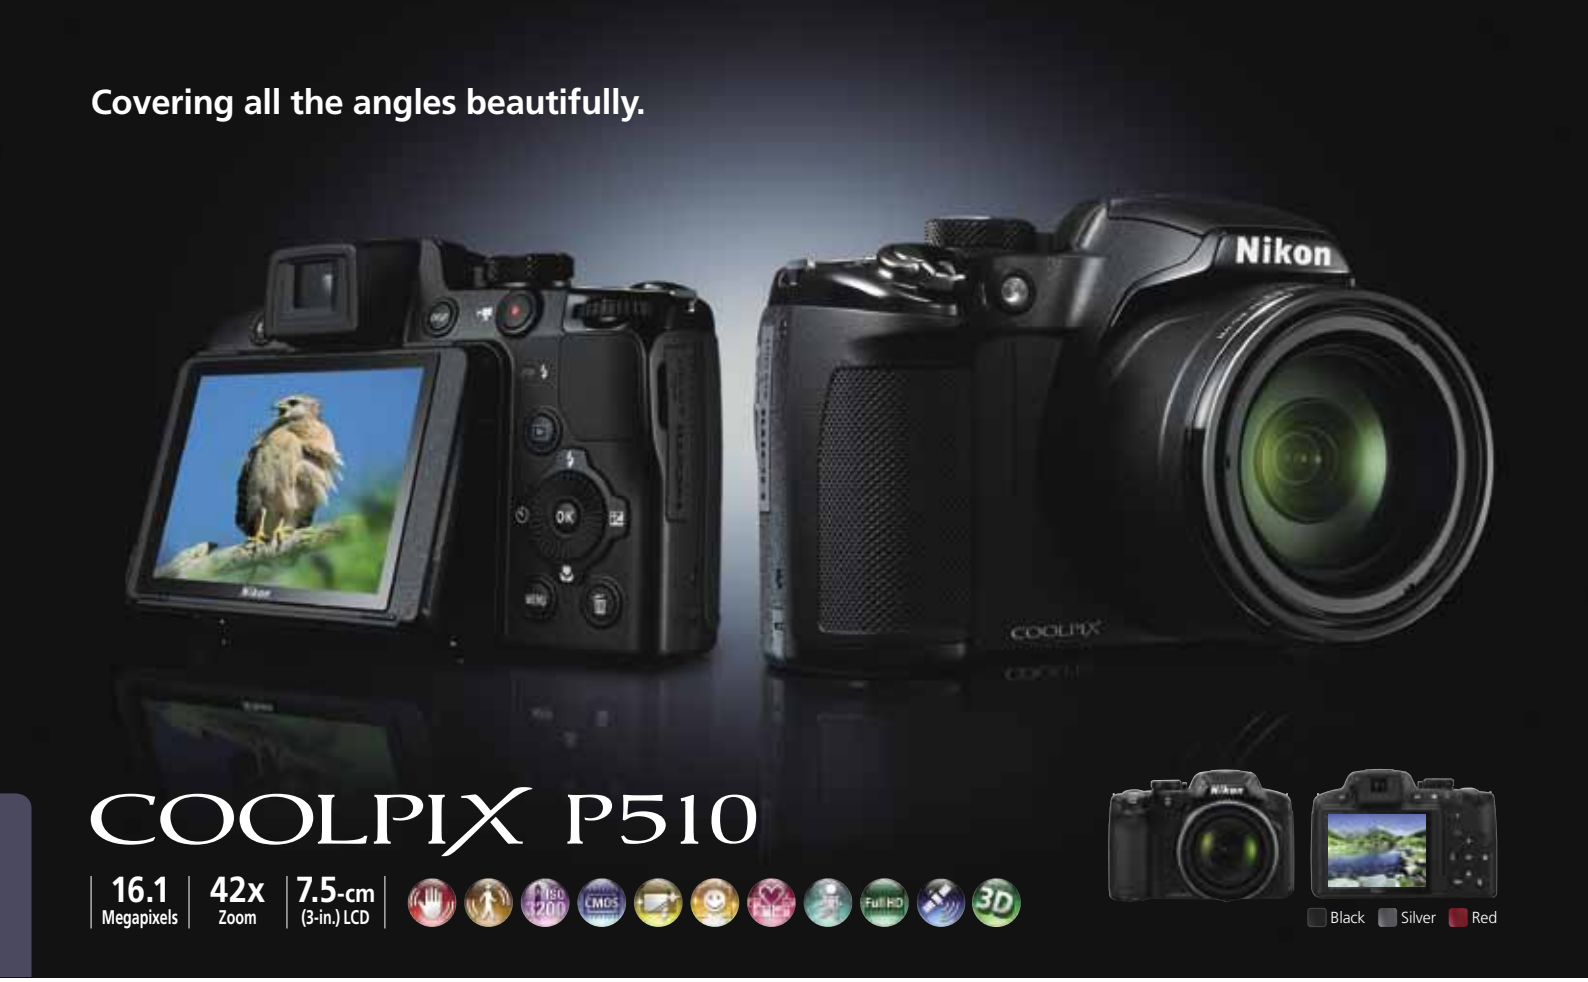

COOLPIX P510

16.1 Megapixels | **42x** Zoom | **7.5-cm** (3-in.) LCD

Black Silver Red

42x optical zoom and highly advanced VR image stabilization

A 16.1 megapixel Back-illuminated CMOS image sensor is paired with a 42x zoom NIKKOR ED glass lens that covers the phenomenal focal range of 24 mm wide-angle to 1000 mm super-telephoto*. Newly advanced Lens-shift VR image stabilization compensates more effectively than ever** for camera shake. This serves as a big aid in achieving consistently sharp results, particularly when taking advantage of the super-zoom or shooting macros.

*35mm format equivalent **Among Nikon COOLPIX cameras

Optimized controls and designed for efficient handling

The 7.5-cm (3-in.) vari-angle 921k-dot (approx.) high-resolution Clear color display can be tilted as much as 90 degrees (approx.) upward or 82 degrees (approx.) downward. You can assign often-used functions to the new Function button for quick one-touch access. The handgrip is designed to help minimize camera shake. And the body includes a side zoom control for stable handling.

High-speed continuous shooting helps capture all the action

The COOLPIX P510 keeps you ahead of the action with high-speed shooting options. High-speed continuous shooting enables rapid capturing at 7-fps (approx.) for full-resolution (4608 x 3456) images*. Other high-speed modes include Sports continuous mode (approx. 60fps/120fps) and the Pre-shooting cache.

*Up to five consecutive images

Beautiful handheld still images at night

The continuous shooting and compositing capabilities of the Back-illuminated CMOS image sensor help you take beautiful Night landscape or Night portrait pictures while shooting with the camera in hand.

Other features

- Built-in GPS with logging function
- EXPEED C2 image processing engine
- COOLPIX Picture Control
- Silhouette and High ISO monochrome effects added to the lineup of available Special effects
- Enhanced Scene auto selector
- Full 1080p HD movie recording with stereo sound and capability to capture still images
- 16 optimized scene modes
- USB charging via Charging AC adapter (supplied) or PC
- Eye-Fi card support

Note: Images shown on this page are simulated.

iFrame

Mac Works with iMovie

The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies.
iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries.
The Works with iMovie logo is a trademark of Apple Inc.

COOLPIX P310

16.1 Megapixels | **4.2x** Zoom | **7.5-cm** (3-in.) LCD



Black White

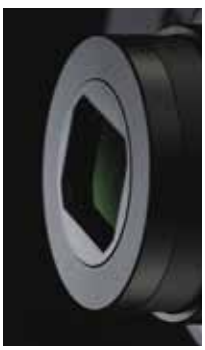

Bright f/1.8, 24mm wide-angle lens and highly advanced VR image stabilization

A specially crafted f/1.8 zoom NIKKOR lens, which includes the use of High refractive index glass elements, yields sharp images with high contrast. Its design also helps achieve a highly compact form factor. The lens' fast aperture, 4.2x optical zoom and 24 mm wide-angle coverage* expand creative possibilities, particularly when shooting indoors or at night. Newly advanced Lens-shift VR image stabilization helps consistently sharp results by realizing the equivalent of using a faster shutter speed setting to effectively compensate for camera shake.

*35mm format equivalent

Back-illuminated CMOS image sensor helps realize high image quality

16.1 effective megapixels of pure imaging power yields the high-resolution images you desire. The combined continuous shooting capabilities of this Back-illuminated CMOS image sensor optimize performance when shooting at night to deliver beautiful results and reproduce even the fine details.

Manual and custom settings for creating your envisioned image

The dedicated Mode dial provides easy access to the P/S/A/M exposure modes, while its User setting mode labeled "U" lets you save your favorite settings for use at any time. Often-used functions can be assigned to the new Function button on the face of the camera for quick access. And, there's an independent Command dial that provides finer creative control over settings while shooting, as well as convenient functions during playback and menu operation. In addition, COOLPIX Picture Control lets you select a profile defining sharpness, saturation, color adjustment and other settings before shooting that help achieve the ideal result.

Other features

- 7.5-cm (3-in.) high-resolution 921k-dot (approx.) Clear color display
- EXPEED C2 image processing engine
- Silhouette and High ISO monochrome newly added to the lineup of Special effects available when shooting pictures or movies
- Enhanced Scene auto selector
- Full 1080p HD movie recording with stereo sound
- 19 optimized scene modes
- USB charging via Charging AC adapter (supplied) or PC
- Eye-Fi card support

Note: Images shown on this page are simulated.

iFrame

Mac Works with iMovie

The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies.
iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries.
The Works with iMovie logo is a trademark of Apple Inc.

Super-zoom elegance.

COOLPIX S9300

16.0 Megapixels | **18x** Zoom | **7.5-cm** (3-in.) LCD

Black Silver Red Navy

18x optical zoom in a slim, compact body

The versatile reach and range of an 18x optical zoom NIKKOR lens with 25 mm wide-angle to 450 mm super-telephoto coverage* is skillfully squeezed it into a slim, stylish form that fits comfortably in the hand.

*35mm format equivalent

Back-illuminated CMOS image sensor and Lens-shift VR

The imaging power of a 16.0 effective-megapixel Back-illuminated CMOS image sensor works seamlessly with Lens-shift VR image stabilization, even when using the super-telephoto end of the zoom lens to produce beautiful pictures, whether capturing the magnificence of an open vista, or zooming in for a close-up portrait.

7.5-cm (3-in.) high-resolution LCD monitor with wide viewing angle

The new 7.5-cm (3-in.) 921k-dot (approx.) high-resolution LCD monitor for the COOLPIX S9300 employs Nikon's Clear color display technology, which allows it to remain highly visible and sharp indoors or out. It also provides a wide viewing angle that lets you and those you are with all fully enjoy the same quality viewing experience.

GPS with logging, POI and Electronic compass

A high-performance GPS chip records location data for each shot, and can also log your movements, even when not taking pictures. An onboard database of approximately 1.7 million POI (Points of Interest) lets you confirm and record the name of the location when shooting. There is also an Electronic compass function that displays the camera's orientation when shooting and records the location for later viewing on your personal computer.

Full 1080p HD movie recording with stereo sound

Record full 1080p HD movies with stereo sound at the press of a button. You can set the camera to apply Special effects and operate the 18x optical zoom while recording to better realize your vision for the scene. Create highlight digest movies* with the Movie editing function. And a built-in HDMI mini connector enables output to your HDTV.**

*You can omit unwanted action from your movies by pressing the pause button while recording

**HDMI cable available separately

Other features

- EXPEED C2 image processing engine
- High-speed continuous shooting at approx. 6 fps
- 360°/180°Easy panorama mode
- Eye-Fi card support
- Special effects available when shooting pictures or movies
- Filter effects available for stored images
- USB charging via Charging AC adapter (supplied) or PC
- Auto composite night shooting
- Macro shooting from as close as 4 cm (1.6 in.)
- 3D photography

Note: Images shown on this page are simulated.

iFrame

Mac Works with iMovie

The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies. iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. The Works with iMovie logo is a trademark of Apple Inc.

Defining style and superior performance.

COOLPIX S6300

16.0 Megapixels | **10x** Zoom | **6.7-cm** (2.7-in.) LCD

Red Silver Black Gold Blue Magenta

Stylishly slim form with 10x high-performance zoom

Design elegance meets high performance in one of the slimmest, most compact cameras in the 10x optical zoom class. A 10x zoom NIKKOR lens that starts at 25 mm wide-angle coverage* and the advantages of Nikon's Lens-shift VR image stabilization helps you capture consistently beautiful pictures.

*35mm format equivalent

Back-illuminated CMOS image sensor maximizes image quality

The ability of the Back-illuminated CMOS image sensor to produce beautiful results with minimal noise when shooting at high sensitivity (ISO) settings along with its continuous shooting capabilities optimize the performance of Night landscape and Backlighting modes. And with 16.0 effective megapixels of pure imaging power, it also yields high-resolution images.

Special effects and creative functions

Enhance your images with unique artistic expression by applying one of the Soft, High key, Low key, Nostalgic sepia, Selective color, or High-contrast monochrome Special effects when shooting pictures or movies. Apply one of the in-camera Filter effects to shots already taken to add a creative touch. Use the 3D photography to add greater dimension to shots of still subjects. And Easy panorama makes it easy to combine multiple shots into a single panorama view.

Special effects

Soft | Low key | Nostalgic sepia | Selective color

Full 1080p HD movie recording with stereo sound

Record full 1080p HD movies with stereo sound at the press of a button. Operate the 10x zoom while recording to better realize your vision for the scene. Create highlight digest movies* with the Movie editing function. And a built-in HDMI mini connector enables output to your HDTV.**

*You can omit unwanted action from your movies by pressing the pause button while recording

**HDMI cable available separately

Other features

- 6.7-cm (2.7-in.) high-resolution LCD
- EXPEED C2 image processing engine
- Smart portrait system
- Scene auto selector
- Subject tracking
- 19 optimized scene modes
- USB charging via Charging AC adapter (supplied) or PC
- 3D photography
- Eye-Fi card support

Note: Images shown on this page are simulated.

iFrame

Mac Works with iMovie

The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies.
iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries.
The Works with iMovie logo is a trademark of Apple Inc.

The stylish touch on picture taking fun.

COOLPIX S4300

16.0 Megapixels | **6x** Zoom | **7.5-cm** (3-in.) LCD

Silver, Red, Black, White

Intuitive touch control wrapped in ultra-slim elegance

A 7.5-cm (3-in.) 460k-dot (approx.) touch control LCD is housed within a fashionably slim body that fits perfectly in your hand. The touch-control screen fits flush on the back panel, maximizing fun and efficiency, whether navigating menus or enjoying fingertip control over shooting and playback functions.

High-performance zoom and Lens-shift VR image stabilization

From group shots to close-ups, the NIKKOR wide-angle 6x optical zoom lens with 26mm wide angle coverage* and lens-shift VR image stabilization, offers superb precision and sharp resolution, so you can capture moments with ease.

*35mm format equivalent

Special effects and Filter effects

Enhance your images with unique artistic expression by applying one of the Soft, High key, Low key, Nostalgic sepia, Selective color, or High-contrast monochrome Special effects when shooting pictures or movies. Or, apply one of the in-camera Filter effects such as Fisheye, Miniature effect, Selective color, Soft, Cross screen, Color options or Painting to shots already taken to add a creative touch.

Filter effects

Soft

Miniature effect

Cross screen

Selective color

Other features

- EXPEED C2 image processing engine
- Smart portrait system
- Scene auto selector
- Subject tracking
- Eye-Fi card support
- 19 optimized scene modes
- USB charging via Charging AC adapter (supplied) or PC

Note: Images shown on this page are simulated.

Lithium-ion powered with stylishly slim design — genuine COOLPIX satisfaction is within your grasp.

COOLPIX S2600

14.0 Megapixels | **5x** Zoom | **6.7-cm** (2.7-in.) LCD

Black, Pink, Silver, Decorative Black, Red, Decorative Purple

Uses Lithium-ion rechargeable battery

The Lithium-ion battery is light, compact, and can be recharged over and over. More eco-friendly than alkaline and more energy efficient than Ni-MH batteries, it will help you enjoy more photography while saving cost over the long run.

Other features

- 6.7-cm (2.7-in.) high-resolution LCD
- EXPEED C2 image processing engine
- Filter effects available for stored images
- 18 optimized scene modes
- USB charging via Charging AC adapter (supplied) or PC
- Scene auto selector
- Motion detection
- Subject tracking

Note: Images shown on this page are simulated.

Ultra-slim elegance with extended reach.

COOLPIX S3300

16.0 Megapixels | **6x** Zoom | **6.7-cm** (2.7-in.) LCD

Blue Silver Black Red Gold Purple Pink Pale Green

6x wide-angle zoom in an ultra-slim body

Elegant styling and a 19.5 mm (0.8 in.) ultra-slim body defy the functional beauty and advanced performance contained within. Quality craftsmanship is visible from any angle. And a lineup of eight available colors provides the best match for your personal style.

Versatility and image quality with 6x zoom and Lens-shift VR image stabilization

A 6x zoom NIKKOR lens with 26 mm wide-angle coverage* is paired with the advantages of Nikon's Lens-shift VR image stabilization to help you capture consistently sharp and beautiful pictures.

*35mm format equivalent

Add a creative touch with Special effects and Filter effects

Apply Special effects when shooting pictures or movies to explore your own unique artistic expression. You can choose from Soft, High key, Low key, Nostalgic sepia, Selective color, or High-contrast monochrome effects. In-camera Filter effects add the additional ability to add a creative touch to shots already taken.

Special effects

High key

Nostalgic sepia

Selective color

Filter effects

Miniature effect

Cross screen


Painting

Other features

- EXPEED C2 image processing engine
- Smart portrait system
- Scene auto selector
- Subject tracking
- Eye-Fi card support
- 18 optimized scene modes
- USB charging via Charging AC adapter (supplied) or PC
- 6.7-cm (2.7-in.) high-resolution LCD

Note: Images shown on this page are simulated.

Stabilized 26x zoom, compact and user-friendly.

COOLPIX L810

16.1 Megapixels | 26x Zoom | 7.5-cm (3-in.) LCD

Red Black Bronze Blue

Image stabilized 26x zoom with wide-angle capability

It's hard to imagine such a delightfully compact body could house a powerful 26x optical zoom NIKKOR lens with 22.5 mm wide-angle to 585 mm super-telephoto coverage.* Outstanding range and reach makes it as easy to frame a large group or broad vista as it is to zoom right in and capture an extreme close-up from a distance.

*35mm format equivalent

Engineered to help achieve consistently sharper results

Whether shooting still images or movies, and even when operating the zoom while recording movies, Nikon's Lens-shift VR image stabilization compensates for camera shake to help obtain sharper results. The handgrip is designed to ensure a firm hold and help minimize camera shake. And there's also a side zoom control for stable handling.

Without VR

With VR

Easy auto mode and 7.5-cm (3-in.) high-resolution LCD monitor

Easy auto mode lets you simply turn on the camera and start shooting, while leaving the settings to the camera. Also enhancing the shooting and playback experience is a 7.5-cm (3-in.) 921k-dot (approx.) high-resolution TFT LCD monitor. Employing Nikon's Clear color display technology, the monitor remains highly visible and sharp indoors or out. The extremely wide viewing angle it offers is free of color or contrast shifts, so you and those you are with can all fully enjoy the viewing experience.

Easy auto mode

Portrait

Landscape

Night portrait

Night landscape

Close-up

Backlighting

Other features

- Powered by commonly available R6/AA-size batteries
- Smart portrait system
- 19 optimized scene modes
- 3D photography
- 720p HD movie recording with stereo sound
- HDMI connectivity (HDMI cable available separately)
- Eye-Fi card support
- Pet portrait mode

Note: Images shown on this page are simulated.

Capture precious moments beautifully and easily.

COOLPIX L26

16.1 Megapixels | **5x** Zoom | **7.5-cm** (3-in.) LCD

Black Red Silver

16.1 effective megapixels of pure imaging power

The 16.1 effective-megapixel CCD image sensor yields high-resolution images that reproduce even fine details, and leave plenty of leeway for creative cropping. Nikon's EXPEED C2 image processing engine renders those pictures quickly and faithfully, while ensuring that all onboard systems run with optimum speed and efficiency.

5x zoom with 26 mm wide-angle coverage

With focal range coverage from a wide 26 mm to 130 mm telephoto*, the 5x optical zoom NIKKOR lens for the COOLPIX L26 lets you shoot group pictures and architecture at wide-angle, or expressive close-ups from a distance using the telephoto capabilities.

*35mm format equivalent

Easy auto mode and bright 7.5-cm (3-in.) TFT LCD monitor

Easy auto mode lets you simply turn on the camera and start shooting. And helping with the shooting is a 7.5-cm (3-in.) 230k-dot (approx.) TFT LCD monitor with brightness adjustment that is highly visible and sharp indoors or out.

Other features

- Powered by commonly available R6/AA-size batteries
- 18 optimized scene modes
- Eye-Fi card support
- EXPEED C2 image processing engine
- Electronic VR image stabilization
- Smart portrait system

Note: Images shown on this page are simulated.

Preserve valuable memories with ease and beauty.

COOLPIX L25

10.1 Megapixels | **5x** Zoom | **7.5-cm** (3-in.) LCD

Red Black Silver White

5x zoom with wide-angle capability

The 5x optical zoom NIKKOR lens of the COOLPIX L25 covers a focal range from 28 mm wide-angle to 140 mm telephoto*. This makes it easy to capture group pictures and landscapes at the wide end, to expressive close-ups from a distance using the telephoto range.

*35mm format equivalent

The viewing ease of a 7.5-cm (3-in.) TFT LCD monitor

The bright, large display of the 7.5-cm (3-in.) 230k-dot (approx.) TFT LCD monitor offers a clear view, whether previewing a framed shot before snapping the shutter, or looking over images previously taken. The monitor features brightness adjustment for clear viewing in varying lighting conditions.

Easy auto mode

Easy auto mode lets you simply turn on the camera and start shooting, while the camera automatically selects the appropriate scene mode from among Portrait, Night portrait, Night landscape, Landscape, Backlighting and Close-up.

Other features

- Powered by commonly available R6/AA-size batteries
- Smart portrait system
- Eye-Fi card support
- 18 optimized scene modes
- EXPEED C2 image processing engine
- Electronic VR image stabilization

Note: Images shown on this page are simulated.

Making picture-taking and sharing easier and more fun.

COOLPIX S30

10.1 Megapixels | **3x** Zoom | **6.7-cm** (2.7-in.) LCD

Pink Black White Blue

Designed tough for all to enjoy

Built to resist shock, to resist water up to depths of 3m, and also to resist dirt, the COOLPIX S30 welcomes hands of all sizes to shoot with it in carefree fashion. It's also safe to use it at the pool and around water.

Large buttons, simple layout and user-friendly interface

The COOLPIX S30 features a unique symmetrical design with buttons placed and sized for maximum ease of use. The large LCD monitor offers a clear view of the interface, which is designed to be easy to understand. And the camera goes from power-up to either still image or movie shooting mode with one press of dedicated buttons.

Rear

Top

Handy functions make photos more fun to view and share

Create original slide shows with animated effects and music to enjoy with friends or family. The built-in album-making feature lets you create scrapbooks for quick access to favorite pictures and for later enjoyment at any time. Two voice messages can be recorded for each picture, which creates opportunities to share related thoughts or comments with a friend or loved one.

Slide show -Pop art

Other features

- 10.1 effective-megapixel CCD image sensor
- EXPEED C2 image processing engine
- 720p movie recording
- 10 optimized scene modes
- Change colors (Creative slider)

Note: Images shown on this page are simulated.
*Available as 'Point and Shoot' on this model

Outstanding flexibility and control

A 7.5-cm (3-in.) vari-angle 921k-dot high-resolution Clear color display tilts to enable more flexible shooting in a wide range of applications. Front and rear command dials offer control over settings without removing your hands from the grip.

Special effects enable greater artistic expression

Enhance your images while shooting with a variety of easy-to-set effects. Choose from the 'Zoom exposure' and 'Defocus during exposure' mechanical processes, or Special effects modes that include Soft, Nostalgic sepia, High-contrast monochrome, High key, Low key, Selective color, Creative monochrome, and Painting. In-camera Filter effects let you apply similar enhancements to shots already taken.

Defocus during exposure

Zoom exposure

Cross process

720p movie recording with stereo sound

HDMI connectivity (HDMI cable available separately)

Other features

- Virtual horizon display
- Enhanced NRW (RAW) file format support
- Zoom memory (Quick switching between seven preset focal lengths)
- Tone level information for quick and precise image adjustment
- Versatile Exposure and White balance bracketing functions
- Optional WC-E75A Wide-angle Converter Lens

Note: Images shown on this page are simulated.

Built to capture the moment most anywhere you go

Built to withstand depths of up to 10 m, temperatures down to -10°C, and shock from heights of up to 1.5 m, the COOLPIX AW100 is the slim compact camera made to go more of the places you like to explore. Action control enables one-handed control over assigned functions, whether wearing ski gloves or skin-diving gloves. Underwater mode offers automated assistance in capturing beautiful underwater pictures.

GPS geotagging and World map display

A high-performance GPS chip records location data for each shot and can be set to log your movements, even when not taking pictures. Pictures and routes can then be viewed using the new Built-in world map display. It adds a new dimension of photographic pleasure, from tracking your progress on a golf course, to marking the location of that great catch. There is also an Electronic compass function that records the camera's orientation when shooting.

Electronic compass

Full 1080p HD movie recording with stereo sound

HDMI connectivity (HDMI cable available separately)

Other features

- 7.5-cm (3-in.) high-resolution 460k-dot (approx.) Clear color display
- EXPEED C2 image processing engine
- 16.0 effective-megapixel
- Back-illuminated CMOS image sensor
- Combination of Lens shift and Electronic VR
- Easy auto mode
- Smart portrait system
- 19 optimized scene modes

Note: Images shown on this page are simulated.

iFrame

Mac Works with iMovie

The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies. iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. The Works with iMovie logo is a trademark of Apple Inc.

Built-in projector featuring greater quality and versatility.

COOLPIX S1200pj

14.1 Megapixels | **5x** Zoom | **7.5-cm** (3-in.) LCD

Black
Pink

Projector Specifications

- Brightness*1: Up to 20 lumens
- Contrast ratio: 200:1
- Image size: 13 to 152 cm (5 to 60 in.)
- Throw distance: Approx. 0.26 to 3.1 m (11 in. to 10 ft)
- Endurance (battery life)*2: Approx. 1 hour
- Resolution (output): VGA equivalent

*1 Measurement, measuring conditions, and method of notation all comply with ISO 21118.
*2 Based on continuous use of a fully-charged EN-EL12 battery at 25 °C.

The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies. iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. The Works with iMovie logo is a trademark of Apple Inc.

Bundled cable enables iPhone, iPad or iPod connection*

Bundled with the COOLPIX S1200pj is the dedicated Dock Connector Cable that lets you connect your iPhone, iPad or iPod Touch and project video or still images stored within, or even stream contents from YouTube™.

*Available with iPhone, iPad or iPod.
Photo may vary from actual product

Made for iPod iPhone iPad

iPhone, iPad and iPod are trademarks of Apple Inc., registered in the U.S. and other countries.

S1200pj is compatible with iPod nano 6th generation, iPod photo, iPod touch 4th generation, iPod touch 3rd generation, iPhone 4, iPhone 3GS, iPhone 3, iPad 2, iPad.

"Made for iPhone", "Made for iPad" and "Made for iPod" mean that an electronic accessory has been designed to connect specifically to iPhone, iPad or iPod, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPhone, iPad or iPod may affect wireless performance.

iP-PJ Transfer

iP-PJ Transfer is an application that lets you use the COOLPIX S1200pj to project contents stored on your iPhone, iPad or iPod touch.

http://itunes.apple.com/us/app/ip-pj-transfer/id463395217?l=en&mt=8

iPhone, iPad and iPod are trademarks of Apple Inc., registered in the U.S. and other countries.
Microsoft and Excel are either registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

Other features

- 7.5-cm (3-in.) high-resolution 460k-dot (approx.) Clear color display
- EXPEED C2 image processing engine
- Smart portrait system
- USB charging via Charging AC adapter (supplied) or PC

Note: Images shown on this page are simulated.

Vivid, OLED screen featuring realistic playback with richer blacks.

COOLPIX S100

16.0 Megapixels | **5x** Zoom | **8.7-cm** (3.5-in.) OLED

Large OLED screen featuring a clearer, more vivid display

A large 8.7-cm (3.5-in.) 820k-dot (approx.), high-definition OLED touch panel beautifully reproduces all the details. OLED technology does not require a backlight, and this realizes vastly higher contrast, truer blacks, and clearer color reproduction. Each dot responds instantly to changes in current, so refresh rates are fast and the display is free of afterimages. The display achieves a near-180° wide viewing angle.

Touch control in a stylishly slim 18.1 mm design

Intuitive fingertip control enhances the enjoyment of shooting, viewing and sharing photographs. Touch shutter releases the shutter with a single tap once focus and exposure are locked.

Full 1080p HD movie recording with stereo sound

HDMI connectivity (HDMI cable available separately)

Other features

- EXPEED C2 image processing engine
- Filter effects available for stored images
- Smart portrait system
- 20 optimized scene modes
- Subject tracking
- USB charging via Charging AC adapter (supplied) or PC
- Easy auto mode
- 3D photography

Note: Images shown on this page are simulated.

The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies. iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. The Works with iMovie logo is a trademark of Apple Inc.

Fast, powerful and precise 14x optical zoom.

COOLPIX S8200

16.1 Megapixels | 14x Zoom | 7.5-cm (3-in.) LCD

Red Black Silver White

iFrame

Mac Works with iMovie

The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies. iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. The Works with iMovie logo is a trademark of Apple Inc.

14x zoom and 16.1 megapixels of ultra-compact imaging power.

A precision 14x optical zoom NIKKOR ED glass lens with 25 mm wide-angle to 350 mm super-telephoto focal range coverage*, a Back-illuminated CMOS image sensor, lens-shift VR image stabilization, and advanced image processing combine to ensure maximum image quality, day or night.

*35mm format equivalent

Let the camera find and focus on your subject for you

The COOLPIX S8200 features an advanced AF (autofocus) function that finds your subject and sets the appropriate focus area for a sharp lock on that subject, even when other objects lie closer to the camera within the frame.

Focus area selected by new AF system

Full 1080p HD movie recording with stereo sound

HDMI connectivity (HDMI cable available separately)

Other features

- 7.5-cm (3-in.) high-resolution 921k-dot (approx.) Clear color display
- EXPEED C2 image processing engine
- Lens shift VR
- Special effects available when shooting pictures or movies
- Filter effects available for stored images
- Smile timer
- USB charging via Charging AC adapter (supplied) or PC
- High-speed continuous shooting at approx. 6 fps

Note: Images shown on this page are simulated.

Compact elegance, superior performance.

COOLPIX S6200

16.0 Megapixels | 10x Zoom | 6.7-cm (2.7-in.) LCD

White Black Blue Silver Red Pink

iFrame

Mac Works with iMovie

The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies. iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. The Works with iMovie logo is a trademark of Apple Inc.

Stylish compact with powerful 10x zoom

A 10x zoom NIKKOR ED glass lens with 25 mm wide-angle coverage* is elegantly squeezed into a highly compact enclosure. The rear panel features strategically placed controls that allow quicker, surer operation, including the handy Rotary multi selector.

*35mm format equivalent

Versatile image adjustment and editing functions

Enhance pictures or movies with the unique artistic expression of Special effects such as Soft, Nostalgic sepia, High-contrast monochrome, High key, Low key, and Selective color when shooting. In-camera Filter effects such as Soft, Selective color, Cross screen, Fisheye, Miniature effect or Painting can be applied to shots already taken.

Special effects

Soft

Low key

Filter effects

Fisheye

Miniature effect

Other features

- EXPEED C2 image processing engine
- Smart portrait system
- Scene auto selector
- 18 optimized scene modes
- USB charging via Charging AC adapter (supplied) or PC

Note: Images shown on this page are simulated.

COOLPIX PREMIUM FEATURES

Image Stabilization

VR Image Stabilization
All models

Nikon VR (Vibration reduction) image stabilization technologies help achieve beautifully clear results by producing blur-free images when shooting in low light or unsteady conditions.

Motion Detection
All models

Motion detection automatically selects a faster shutter speed and higher ISO (light sensitivity) setting to compensate for subject movement or camera shake.

High Sensitivity
All models

High ISO capability helps capture subjects beautifully in low light, without compromising natural light or requiring long exposure time. By enabling the selection of faster shutter speeds, it also makes it easier to capture fast-moving subjects with greater clarity.

Back-illuminated CMOS Sensor
P510 P310 S9300 S6300 AW100 S100 S8200

Back-illuminated structure improves image sensor sensitivity and noise reduction to realize highly capable shooting of night scenes or dark indoor situations.

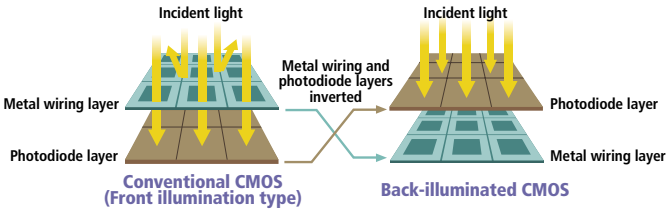

Clear Color Display
P510 P310 S9300 S4300 L810 P7100 AW100 S1200pj S100 S8200

Nikon's innovative Clear color display technology improves visibility for a more vivid, clearer image preview and playback.

The Clear color difference

Touch Screen
S4300 S100

Simply touch the screen to select your subject, lock autofocus and exposure, zoom in for close-ups, or to scroll through and select images for viewing.

Smart Portrait System

Each of the advanced functions of the Smart portrait system is designed to help produce consistently great portraits.

Skin Softening — All models
Face-Priority AF — All models
Smile Timer — All models
Blink Warning — All models
Blink Proof — P510 P310 S6300 S4300 S2600 S3300 L810 L26 L25 S30 AW100 S1200pj S6200
In-Camera Red-Eye Fix — All models

Scene Auto Selector/ Easy Auto Mode
All models

These functions provide quick, carefree picture-taking in a variety of situations by determining the subject and surrounding conditions, and then automatically selecting the appropriate scene mode for the shot.*

*Available as 'Point and Shoot' on the S30

Subject Tracking
P510 P310 S9300 S6300 S4300 S2600 S3300 P7100 AW100 S1200pj S100 S8200 S6200

Subject tracking enhances your shooting experience by following the movement of your subject.



Full HD Movie
P510 P310 S9300 S6300 AW100 S100 S8200

720p Movie
S4300 S2600 S3300 L810 L26 L25 S30 P7100 S1200pj S6200

COOLPIX cameras that carry the 720p logo can record at 1,280 x 720 pixels (720p). Those marked with the Full HD logo can record at 1,920 x 1,080 pixels (1080p).

Projector
S1200pj

Project your favorite photos or movie clips on a large surface individually or as slide shows complete with music and added effects.

Rugged Reliability
S30 AW100

Water-resistant, shock resistant, and weather-resistant COOLPIX models are built tough enough to serve well while enjoying outdoor activities at any time of the year.

Built-in GPS
P510 S9300 AW100

A high-performance GPS chip records the latitude and longitude locating where each picture was taken.

Built-in World Map
AW100

Offers a handy reference by displaying the location where pictures were taken, or the route defined by log records made using the GPS chip.

3D Photography
P510 P310 S9300 S6300 L810 S100

3D image shooting capability makes it easy to create composite images that achieve realistic playback on 3D-capable TVs and computers.

Note: Feature availability varies according to camera model.
Images shown on this page are simulated.

Specifications

		New COOLPIX P510	New COOLPIX P310	New COOLPIX S9300	New COOLPIX S6300	New COOLPIX S4300
Effective pixels		16.1 milion	16.1 milion	16.0 million	16.0 million	16.0 million
Lens		42x zoom NIKKOR; 4.3-180 mm (35mm [135] format angle of view: 24-1000 mm); f/3-5.9; Digital zoom: up to 2x (35mm [135] format angle of view: Approx. 2000 mm)	4.2x zoom NIKKOR; 4.3-17.9 mm (35mm [135] format angle of view: 24-100 mm); f/1.8-4.9; Digital zoom: up to 2x (35mm [135] format angle of view: Approx. 200 mm)	18x zoom NIKKOR; 4.5-81.0 mm (35mm [135] format angle of view: 25-450 mm); f/3.5-5.9; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 1800 mm)	10x zoom NIKKOR; 4.5-45.0 mm (35mm [135] format angle of view: 25-250 mm); f/3.2-5.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 1000 mm)	6x zoom NIKKOR; 4.6-27.6 mm (35mm [135] format angle of view: 26-156 mm); f/3.5-6.5; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 624 mm)
Focus range (from lens)		50 cm (1 ft 8 in.) to infinity (∞), Macro close-up mode: 1 cm (0.4 in.) to infinity (∞)	30 cm (1 ft) to infinity (∞), Macro close-up mode: 2 cm (0.8 in.) to infinity (∞)	50 cm (1 ft 8 in.) to infinity(∞), Macro mode: 4 cm (1.6 in.) to infinity (∞)	50 cm (1 ft 8 in.) to infinity (∞), Macro mode: 10 cm (4 in.) to infinity (∞)	50 cm (1 ft 8 in.) to infinity(∞), Macro mode: 5 cm (2 in.) to infinity (∞)
Monitor		7.5-cm (3-in.), approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating	7.5-cm (3-in.), approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating	7.5-cm (3-in.), approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating	6.7-cm (2.7-in.), approx. 230k-dot, TFT LCD with anti-reflection coating	7.5-cm (3-in.), approx. 460k-dot, TFT LCD with touch screen control and anti-reflection coating
Storage media		SD/SDHC/SDXC memory card*3	SD/SDHC/SDXC memory card*3	SD/SDHC/SDXC memory card*3	SD/SDHC/SDXC memory card*3	SD/SDHC/SDXC memory card*3
ISO sensitivity		ISO 100, 200, 400, 800, 1600, 3200, Hi1 (equivalent to 6400), Auto (auto gain ISO 100-1600), Fixed range auto (ISO 100-400, 100-800), Hi2 (equivalent to 12800) (High ISO monochrome in special effect mode)	ISO 100, 200, 400, 800, 1600, 3200, Hi1 (equivalent to 6400), Auto (auto gain ISO 100-1600), Fixed range auto (ISO 100-400, 100-800), Hi2 (equivalent to 12800) (High ISO monochrome in special effect mode)	ISO 125, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 125-1600), Fixed range auto (ISO 125-400, 125-800)	ISO 125, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 125-1600), Fixed range auto (ISO 125-400, 125-800)	ISO 80, 100, 200, 400, 800, 1600, 3200*4, Auto (auto gain ISO 80-1600), Fixed range auto (ISO 80-400, 80-800)
Power sources	**Supplied**	Rechargeable Li-ion Battery EN-EL5, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL19, Charging AC Adapter EH-69P
	Optional	AC Adapter EH-62A, Battery Charger MH-61	AC Adapter EH-62F, Battery Charger MH-65	AC Adapter EH-62F, Battery Charger MH-65	AC Adapter EH-62F, Battery Charger MH-65	AC Adapter EH-62G, Battery Charger MH-66
Battery life*1		Approx. 240 shots with EN-EL5 battery	Approx. 230 shots with EN-EL12 battery	Approx. 200 shots with EN-EL12 battery	Approx. 230 shots with EN-EL12 battery	Approx. 180 shots with EN-EL19 battery
Dimensions (W x H x D)		Approx. 119.8 x 82.9 x 102.2 mm (4.8 x 3.3 x 4.1 in.) excluding projections*8	Approx. 103.0 x 58.3 x 32.0 mm (4.1 x 2.3 x 1.3 in.) excluding projections*8	Approx. 108.7 x 62.3 x 30.6 mm (4.3 x 2.5 x 1.3 in.) excluding projections*8	Approx. 93.6 x 57.7 x 26.0 mm (3.7 x 2.3 x 1.1 in.) excluding projections*8	Approx. 95.5 x 58.9 x 20.8 mm (3.8 x 2.4 x 0.9 in.) excluding projections*8
Weight		Approx. 555 g (1 lb 3.6 oz) with battery and SD memory card*8	Approx. 194 g (6.9 oz) with battery and SD memory card*8	Approx. 215 g (7.6 oz) with battery and SD memory card*8	Approx. 160 g (5.7 oz) with battery and SD memory card*8	Approx. 139 g (5.0 oz) with battery and SD memory card*8

*1 Based on CIPA industry standard for measuring life of camera batteries. Measured at 23°C; zoom adjusted with each shot, built-in flash fired with every other shot, image mode set to Normal.
*2 Focus range (from the protective glass).
*3 Not compatible with Multi Media Cards (MMC).
*4 Setting is available only for image sizes of 4M (2272 × 1704) or 2M (1600 × 1200) or VGA (640 × 480).
*5 Setting is available only for image sizes of 2M (1600 × 1200) or VGA (640 × 480).
*6 In case of using four AA Energizer® Ultimate Lithium batteries.
*7 In case of using two AA Energizer® Ultimate Lithium batteries.
*8 Method of noting dimensions and weight is in accordance with CIPA DCG-005-2009 guideline.

Note: Camera lineup and color availability may vary according to region.

Specifications

		New	New	New	New	New	New
		COOLPIX S2600	COOLPIX S3300	COOLPIX L810	COOLPIX L26	COOLPIX L25	COOLPIX S30
Effective pixels		14.0 million	16.0 million	16.1 million	16.1 million	10.1 million	10.1 million
Lens		5x zoom NIKKOR; 4.6-23.0 mm (35mm [135] format angle of view: 26-130 mm); f/3.2-6.5; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 520 mm)	6x zoom NIKKOR; 4.6-27.6 mm (35mm [135] format angle of view: 26-156 mm); f/3.5-6.5; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 624 mm)	26x zoom NIKKOR; 4.0-104 mm (35mm [135] format angle of view: 22.5-585 mm); f/3.1-5.9; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 2340 mm)	5x zoom NIKKOR; 4.6-23.0 mm (35mm [135] format angle of view: 26-130mm); f/3.2-6.5; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 520 mm)	5x zoom NIKKOR; 4.0-20.0 mm (35mm [135] format angle of view: 28-140 mm); f/2.7-6.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 560 mm)	3x zoom NIKKOR; 4.1-12.3 mm (35mm [135] format angle of view: 29.1 - 87.3 mm); f/3.3-5.9; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 349 mm)
Focus range (from lens)		50 cm (1 ft 8 in.) to infinity (∞), Macro mode: 10 cm (4 in.) to infinity (∞)	50 cm (1 ft 8 in.) to infinity (∞), Macro mode: 5 cm (2 in.) to infinity (∞)	50 cm (1 ft 8 in.) to infinity (∞), Macro mode: 1 cm (0.4 in.) to infinity (∞)	50 cm (1 ft 8 in.) to infinity (∞); Macro mode: 10 cm (4 in.) to infinity (∞)	30 cm (1 ft) to infinity (∞), Macro mode: 3 cm (1.2 in.) to infinity (∞)	30 cm (1 ft) to infinity (∞) Shoot close-ups/Shoot under water/Photograph food/ Highlight colors/ Take soft pictures/Create a diorama effect: 5 cm (2 in.) to infinity (∞)*2
Monitor		6.7-cm (2.7-in.), approx. 230k-dot, TFT LCD	6.7-cm (2.7-in.), approx. 230k-dot, TFT LCD with anti-reflection coating	7.5-cm (3-in.), approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating	7.5-cm (3-in.), approx. 230k-dot, TFT LCD	7.5-cm (3-in.), approx. 230k-dot, TFT LCD	6.7-cm (2.7-in.), approx. 230k-dot, TFT LCD
Storage media		SD/SDHC/SDXC memory card*3	SD/SDHC/SDXC memory card*3	SD/SDHC/SDXC memory card*3	SD/SDHC/SDXC memory card*3	SD/SDHC/SDXC memory card*3	SD/SDHC/SDXC memory card*3
ISO sensitivity		ISO 80, 100, 200, 400, 800, 1600, 3200*5, Auto (auto gain ISO 80-1600), Fixed range auto (ISO 80-400, 80-800)	ISO 80, 100, 200, 400, 800, 1600, 3200*4, Auto (auto gain ISO 80-1600), Fixed range auto (ISO 80-400, 80-800)	ISO 80, 100, 200, 400, 800, 1600, Auto (auto gain ISO 80-1600)	Auto (auto gain ISO 80-1600)	Auto (auto gain ISO 80-1600)	Auto (auto gain ISO 80-1600)
Power sources	**Supplied**	Rechargeable Li-ion Battery EN-EL19, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL19, Charging AC Adapter EH-69P	Four LR6/L40 (AA-size) alkaline batteries	Two LR6/L40 (AA-size) alkaline batteries	Two LR6/L40 (AA-size) alkaline batteries	Two LR6/L40 (AA-size) alkaline batteries
	Optional	AC Adapter EH-62G, Battery Charger MH-66	AC Adapter EH-62G, Battery Charger MH-66	Four FR6/L91 (AA-size) lithium batteries, Four EN-MH2 rechargeable Ni-MH batteries, AC Adapter EH-67, Battery Charger MH-73	Two FR6/L91 (AA-size) lithium batteries, Two EN-MH2 rechargeable Ni-MH batteries, AC Adapter EH-65A, Battery Charger MH-72/MH-73	Two FR6/L91 (AA-size) lithium batteries, Two EN-MH2 rechargeable Ni-MH batteries, AC Adapter EH-65A, Battery Charger MH-72/MH-73	Two FR6/L91 (AA-size) lithium batteries, Two EN-MH2 rechargeable Ni-MH batteries, Battery Charger MH-72/MH-73
Battery life*1		Approx. 220 shots with EN-EL19 battery	Approx. 210 shots with EN-EL19 battery	Approx. 300 shots with alkaline, 740 shots with lithium*6, or 450 shots with EN-MH2 battery	Approx. 200 shots with alkaline, 680 shots with lithium*7, or 350 shots with EN-MH2 battery	Approx. 220 shots with alkaline, 680 shots with lithium*7, or 370 shots with EN-MH2 battery	Approx. 240 shots with alkaline, 700 shots with lithium*7, or 410 shots with EN-MH2 battery
Dimensions (W x H x D)		Approx. 93.8 x 58.4 x 19.5 mm (3.7 x 2.3 x 0.8 in.) excluding projections*8	Approx. 94.8 x 57.8 x 19.5 mm (3.8 x 2.3 x 0.8 in.) excluding projections*8	Approx. 111.1 x 76.3 x 83.1 mm (4.4 x 3.1 x 3.3 in.) excluding projections*8	Approx. 96.0 x 59.7 x 28.8 mm (3.8 x 2.4 x 1.2 in.) excluding projections*8	Approx. 96.2 x 60.4 x 29.2 mm (3.8 x 2.4 x 1.2 in.) excluding projections*8	Approx. 101.9 x 64.8 x 39.4 mm (4.1 x 2.6 x 1.6 in.) excluding projections*8
Weight		Approx. 121 g (4.3 oz) with battery and SD memory card*8	Approx. 128 g (4.6 oz) with battery and SD memory card*8	Approx. 430 g (15.2 oz) with battery and SD memory card*8	Approx. 164 g (5.8 oz) with battery and SD memory card*8	Approx. 171 g (6.1 oz) with battery and SD memory card*8	Approx. 214 g (7.6 oz) with battery and SD memory card*8

*1 Based on CIPA industry standard for measuring life of camera batteries. Measured at 23°C; zoom adjusted with each shot, built-in flash fired with every other shot, image mode set to Normal.
*2 Focus range (from the protective glass).
*3 Not compatible with Multi Media Cards (MMC).
*4 Setting is available only for image sizes of 4M (2272 × 1704) or 2M (1600 × 1200) or VGA (640 × 480).
*5 Setting is available only for image sizes of 2M (1600 × 1200) or VGA (640 × 480).
*6 In case of using four AA Energizer® Ultimate Lithium batteries.
*7 In case of using two AA Energizer® Ultimate Lithium batteries.
*8 Method of noting dimensions and weight is in accordance with CIPA DCG-005-2009 guideline.

COOLPIX P7100

10.1 million

7.1x zoom NIKKOR; 6.0-42.6 mm (35mm [135] format angle of view: 28-200 mm); f/2.8-5.6; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 800 mm)

50 cm (1 ft 8 in.) to infinity (∞), Macro close-up mode: 2 cm (0.8 in.) to infinity (∞)

7.5-cm (3-in.), approx. 921k-dot, wide-viewing angle, vari-angle TFT LCD with anti-reflection coating

SD/SDHC/SDXC memory card*3

ISO 100, 200, 400, 800, 1600, 3200, Hi 1 (equivalent to 6400), Auto (auto gain ISO 100-800), High ISO sensitivity auto (ISO 100-1600), Fixed range auto (ISO 100-200, 100-400), Low noise night mode (ISO 400-12800)

Rechargeable Li-ion Battery EN-EL14, Battery Charger MH-24

AC Adapter EH-5b with Power Connector EP-5A

Approx. 350 shots with EN-EL14 battery

Approx. 116.3 x 76.9 x 48.0 mm (4.6 x 3.1 x 1.9 in.) excluding projections*8

Approx. 395 g (14.0 oz) with battery and SD memory card*8

COOLPIX AW100

16.0 million

5x zoom NIKKOR; 5.0-25.0 mm (35mm [135] format angle of view: 28-140 mm); f/3.9-4.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 560 mm)

50 cm (1 ft 8 in.) to infinity (∞), Macro mode: 1 cm (0.4 in.) to infinity (∞)

7.5-cm (3-in.), approx. 460k-dot, wide-viewing angle TFT LCD with anti-reflection coating

SD/SDHC/SDXC memory card*3

ISO 125, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 125-800), Fixed range auto (ISO 125-400)

Rechargeable Li-ion Battery EN-EL12, Battery Charger MH-65

AC Adapter EH-62F

Approx. 250 shots with EN-EL12 battery

Approx. 110.1 x 64.9 x 22.8 mm (4.4 x 2.6 x 0.9 in.) excluding projections*8

Approx. 178 g (6.3 oz) with battery and SD memory card*8

COOLPIX S1200pj

14.1 million

5x zoom NIKKOR; 5.0-25.0 mm (35mm [135] format angle of view: 28-140mm); f/3.9-5.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 560 mm)

30 cm (1 ft) to infinity (∞), Macro mode: 3 cm (1.2 in.) to infinity (∞)

7.5-cm (3-in.), approx. 460k-dot, TFT LCD with anti-reflection coating

SD/SDHC/SDXC memory card*3

ISO 80, 100, 200, 400, 800, 1600, 3200, 6400, Auto (auto gain ISO 80-800), Fixed range auto (ISO 80-200, 80-400)

Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P

AC Adapter EH-62F, Battery Charger MH-65

Approx. 220 shots with EN-EL12 battery

Approx. 107.0 x 63.4 x 22.6 mm (4.3 x 2.5 x 0.9 in.) excluding projections*8

Approx. 186 g (6.6 oz) with battery and SD memory card*8

COOLPIX S100

16.0 million

5x zoom NIKKOR; 5.0-25.0 mm (35mm [135] format angle of view: 28-140 mm); f/3.9-4.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 560 mm)

50 cm (1 ft 8 in.) to infinity (∞), Macro mode: 1 cm (0.4 in.) to infinity (∞)

8.7-cm (3.5-in.), approx. 820k-dot, wide-viewing angle OLED monitor with touch screen control and anti-reflection coating

SD/SDHC/SDXC memory card*3

ISO 125, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 125-800), Fixed range auto (ISO 125-400)

Rechargeable Li-ion Battery EN-EL19, Charging AC Adapter EH-69P

AC Adapter EH-62G, Battery Charger MH-66

Approx. 150 shots with EN-EL19 battery

Approx. 99.0 x 65.2 x 18.1 mm (3.9 x 2.6 x 0.8 in.) excluding projections*8

Approx. 138 g (4.9 oz) with battery and SD memory card*8

COOLPIX S8200

16.1 million

14x zoom NIKKOR; 4.5-63.0 mm (35mm [135] format angle of view: 25-350 mm); f/3.3-5.9; Digital zoom: up to 2x (35mm [135] format angle of view: Approx. 700 mm)

50 cm (1 ft 8 in.) to infinity (∞), Macro mode: 1 cm (0.4 in.) to infinity (∞)

7.5-cm (3-in.), approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating

SD/SDHC/SDXC memory card*3

ISO 100, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 100-1600), Fixed range auto (ISO 100-400, 100-800), High-speed continuous (ISO 100-1600)

Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P

AC Adapter EH-62F, Battery Charger MH-65

Approx. 250 shots with EN-EL12 battery

Approx. 103.7 x 59.3 x 32.7 mm (4.1 x 2.4 x 1.3 in.) excluding projections*8

Approx. 213 g (7.6 oz) with battery and SD memory card*8

COOLPIX S6200

16.0 million

10x zoom NIKKOR; 4.5-45.0 mm (35mm [135] format angle of view: 25-250 mm); f/3.2-5.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 1000 mm)

50 cm (1 ft 8 in.) to infinity (∞), Macro mode: 10 cm (4.0 in.) to infinity (∞)

6.7-cm (2.7-in.), approx. 230k-dot, TFT LCD with anti-reflection coating

SD/SDHC/SDXC memory card*3

ISO 80, 100, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 80-1600), Fixed range auto (ISO 80-400, 80-800)

Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P

AC Adapter EH-62F, Battery Charger MH-65

Approx. 250 shots with EN-EL12 battery

Approx. 93.0 x 56.7 x 25.4 mm (3.7 x 2.3 x 1.0 in.) excluding projections*8

Approx. 160 g (5.7 oz) with battery and SD memory card*8

Note: Camera lineup and color availability may vary according to region.

I AM AT THE HEART OF THE IMAGE

www.europe-nikon.com

Microsoft®, Windows®, Windows Vista™, and Windows® 7 are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh®, Mac® OS and QuickTime® are either registered trademarks or trademarks of Apple Inc. in the United States and/or other countries. The SDXC logo is a registered trademark of SD-3C, LLC in the United States and/or other countries. PictBridge is a trademark. The FotoNation logo is a trademark. NetFront is a registered trademark or trademark of ACCESS Co., LTD in Japan, the United States and/or other countries and regions. "ZENRIN" is a registered trade mark of ZENRINCO., LTD. NAVTEQ Maps is a trademark of NAVTEQ. DLP® and the DLP logo are trademarks of Texas Instruments. Products and brand names are trademarks or registered trademarks of their respective companies. Images on displays shown in this brochure are simulated.

Specifications and equipment are subject to change without any notice or obligation on the part of the manufacturer. February 2012 ©2012 Nikon Corporation

WARNING **TO ENSURE CORRECT USAGE, READ MANUALS CAREFULLY BEFORE USING YOUR EQUIPMENT. SOME DOCUMENTATION IS SUPPLIED ON CD-ROM ONLY.**

Visit the Nikon Europe website at: **www.europe-nikon.com**

iamnikon.com

Nikon U.K. Ltd. Nikon House, 380 Richmond Road, Kingston upon Thames, Surrey KT2 5PR U.K. **www.nikon.co.uk**
Foto Distributors Nikon House, 68 Kyalami Boulevard, Kyalami Business Park, Midrand, 1684, Republic of South Africa **www.nikon.co.za**
Nikon Canada Inc. 1366 Aerowood Drive, Mississauga, Ontario, L4W 1C1, Canada **www.nikon.ca**
NIKON CORPORATION Shin-Yurakucho Bldg., 12-1, Yurakucho 1-chome, Chiyoda-ku, Tokyo 100-8331, Japan **www.nikon.com**

Printed in the Netherlands Code No.6CE12010 (1202A) Ad

En